




# DYMO LabelPOINT 100 Rubber Transport Roller Replacement

Replace a damaged rubber transport roller

Written By: Deborah Canas

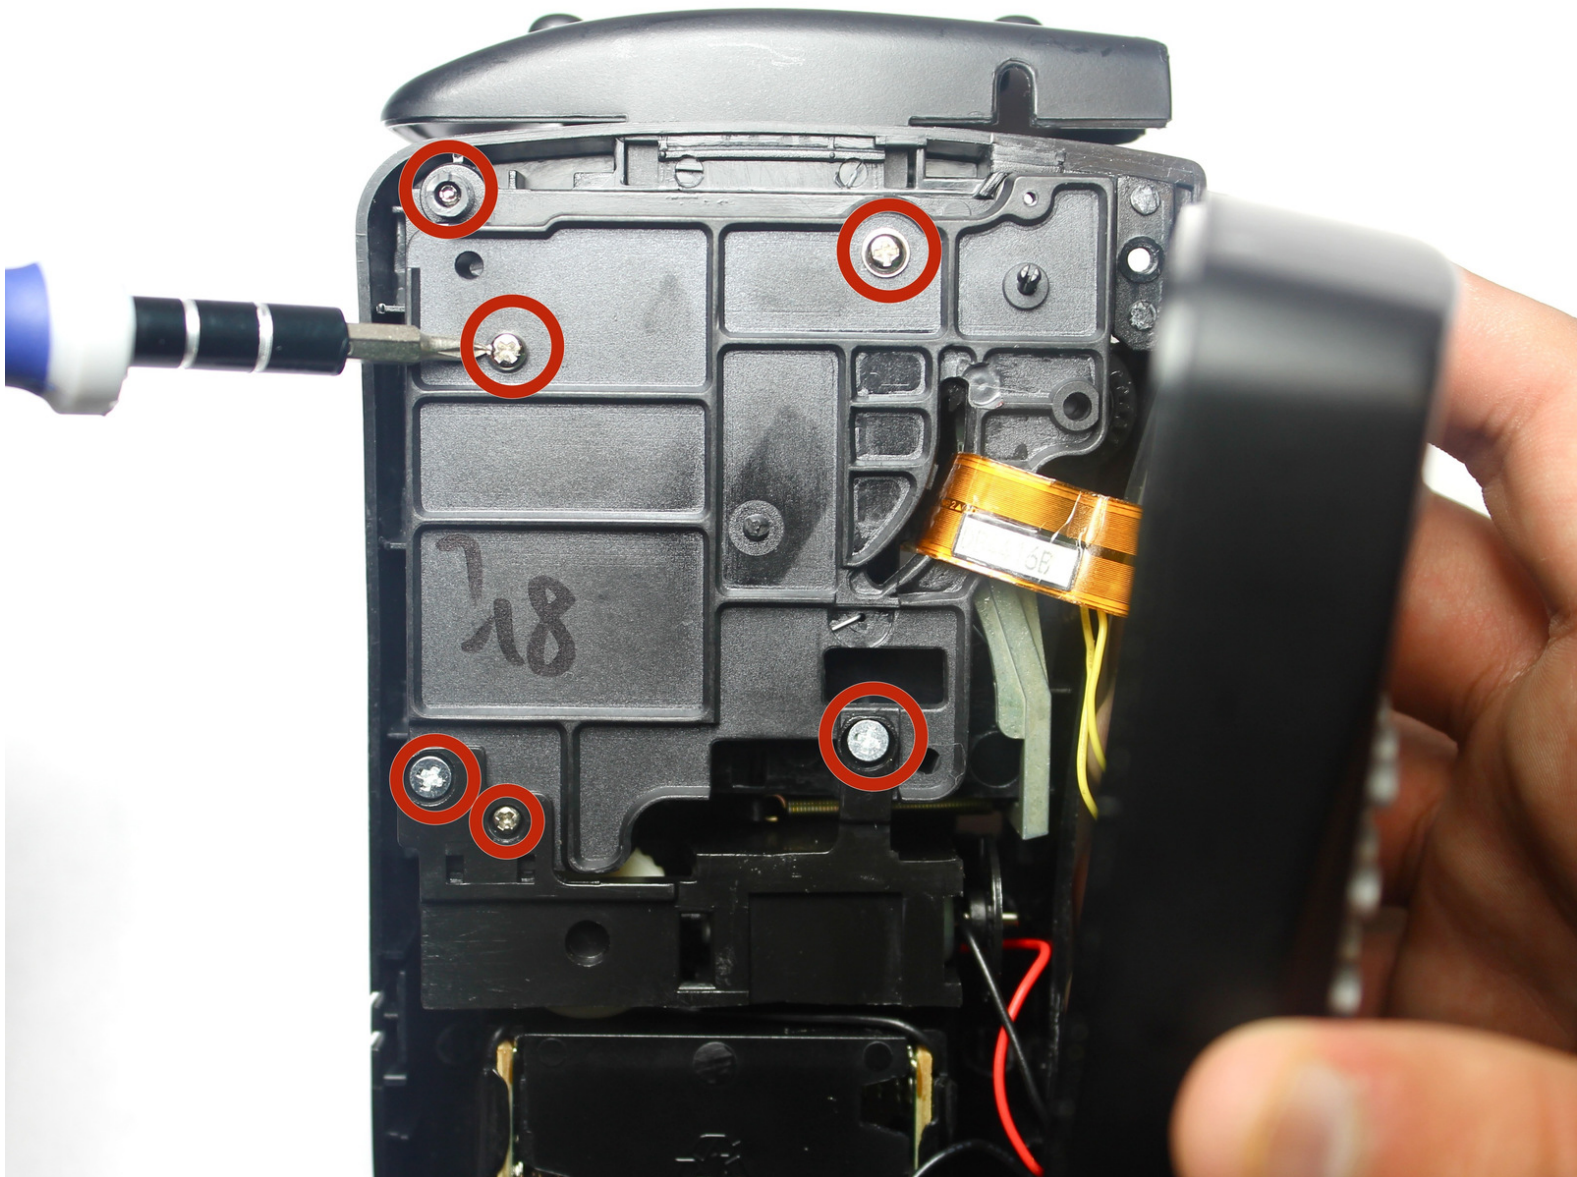



## TOOLS:

- [Phillips #00 Screwdriver](#) (1)



## PARTS:


- [Rubber Transport Roller](#) (1)

## Step 1 — Rear Panel



- Slide the panel release button.
- Lift the panel.

## Step 2 — Remove Label Tape Cassette

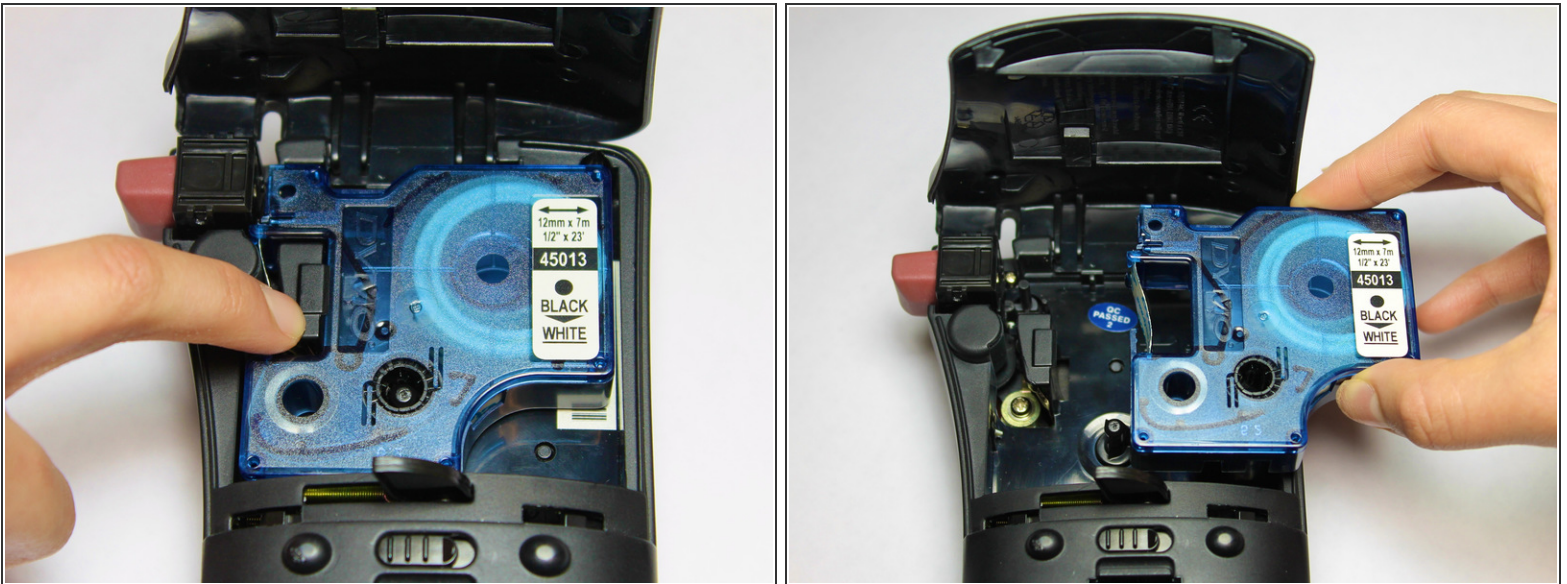

- Firmly press the cartridge release button with your finger.
  - You may need to hold the cassette and/or entire device still while pressing the button.
- Lift the label tape cassette out of the device.



### Step 3 — Remove Screws To the Access Panel




- Use Phillips #00 screwdriver to remove three screws
- Remove blade cutter
- Use Phillips #00 screwdriver to remove remaining two screws from the battery compartment


### Step 4



- Gently pull the access panel up to separate from the device

 Some electrical wiring will be exposed and will not detach. Be careful not to damage any electrical wiring when removing access panel.


## Step 5 — Remove Back Panel

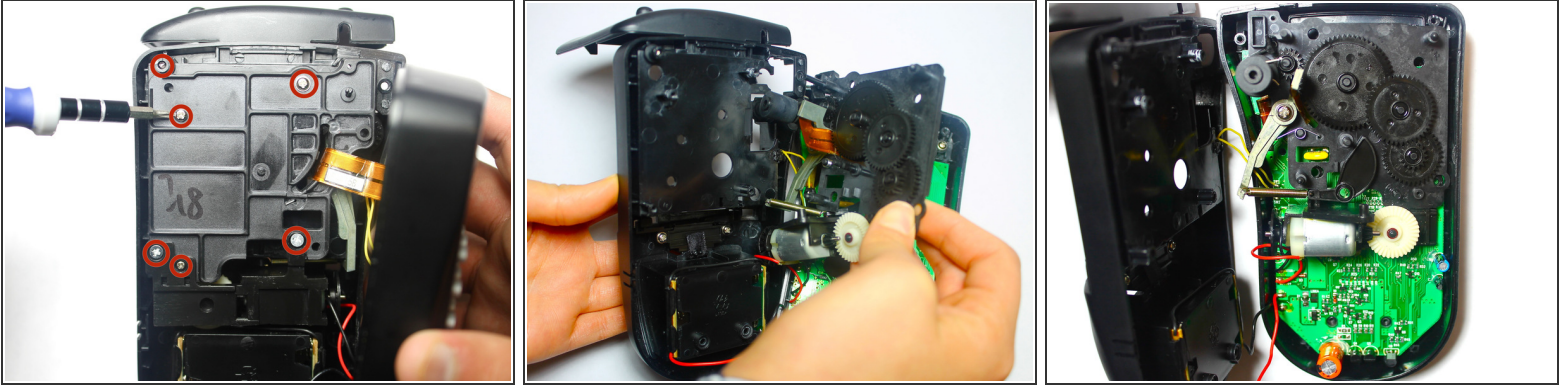

- Use Phillips #00 screwdriver to remove six screws
- Slowly separate back panel

⚠ Gears attached to the back panel are not secured and have a tendency to fall out. This will cause difficulty when reassembling

## Step 6 — Remove Rubber Transport Roller

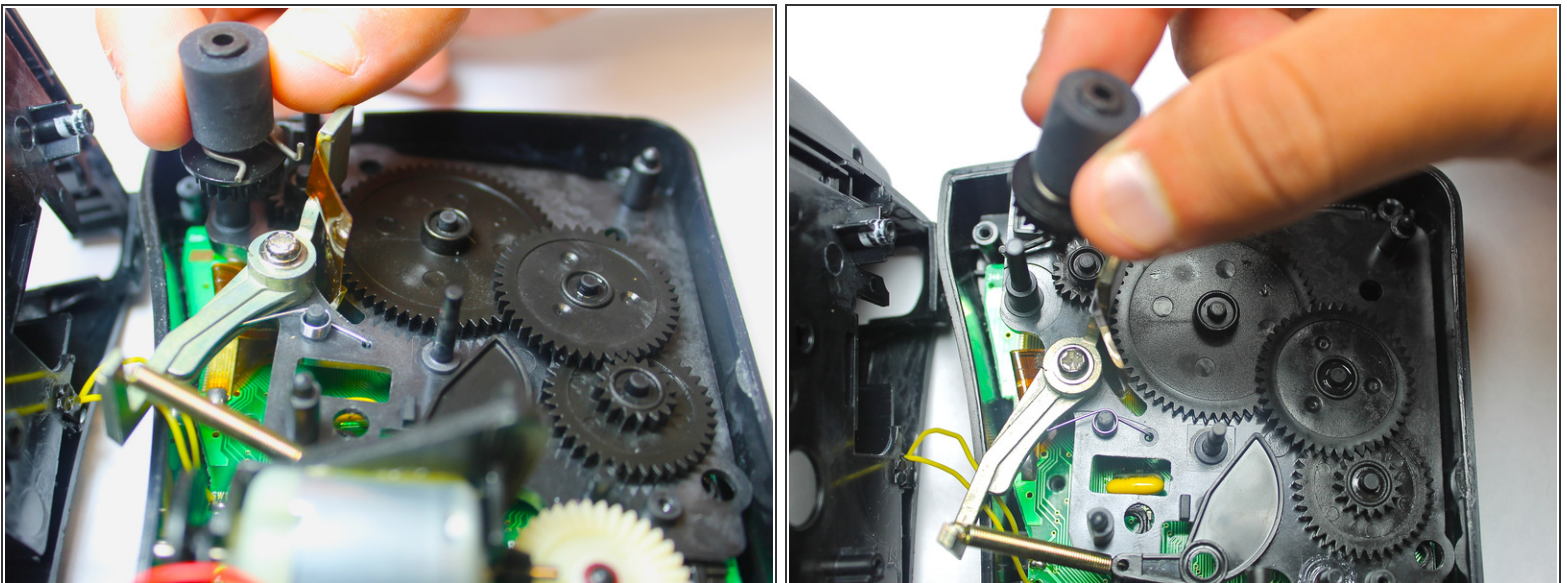

- Gently pull rubber transport roller up to remove
- Replace rubber transport roller

To reassemble your device, follow these instructions in reverse order.

